
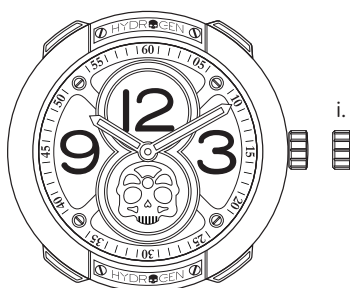


# HYDROGEN

## WATCH

TIME MODULE CALIBER VC00 - 2 HAND QUARTZ

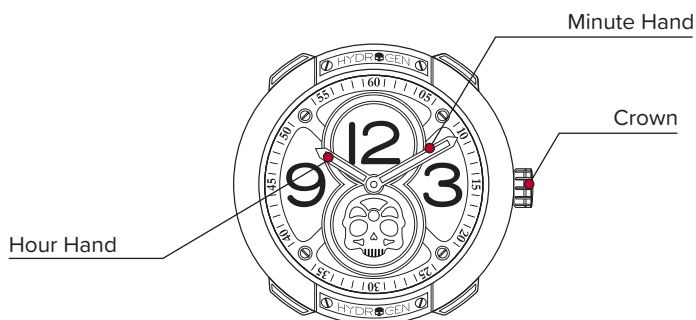

### HOW TO SET THE TIME

- 1) Pull out the crown to the first click position.
- 2) Turn the crown to set the hour and minute hands.  
(Check that AM / PM is set correctly.)
- 3) Push the crown back into the normal position.

# HYDROGEN GEN

## WATCH

CARE | PRECAUTIONS | WATER RESISTANCE OVERVIEW

### CARE AND PRECAUTIONS

Each Hydrogen Watch is designed and manufactured to the highest of standards. In order to ensure optimal performance and longevity, please review the simple guidelines for care and precautions of your Hydrogen Watch.

#### CARE

Clean your watch with water and a soft cloth only. Do not dive. After contact with saltwater, your watch should be rinsed clean with a soft, dry cloth. It's our recommendation that your watch be serviced every 18-24 months to ensure longevity and trouble-free usage.

#### PRECAUTIONS

It's important to avoid the following conditions: extreme heat or cold, as well as prolonged periods of exposure to direct sunlight, to wet conditions that exceed the watch water rating (see case-back and below chart). Never operate any of the function buttons or adjust the position of the crown when the watch is in contact with water.

Your Watch should not be affected by magnetic fields generated by household items such as televisions and stereos, but avoidance of other strong electric fields or static electricity is advised. It's also important to avoid extreme shock or impact.

### WATER RESISTANCE TABLE

| WATER RESISTANCE   |                         | WATER-RELATED USE |                   |                     |              |
|--|-------------------------|-------------------|-------------------|---------------------|--------------|
| CASE-BACK MARKING  | DEPTH                   | WASHING HANDS     | SHOWERING BATHING | SWIMMING SNORKELING | SCUBA DIVING |
| -  | -                       | ×                 | ×                 | ×                   | ×            |
| WR   | -                       | ○                 | ×                 | ×                   | ×            |
| 3 ATM  | 30 METERS<br>100 FEET   | ○                 | ×                 | ×                   | ×            |
| 5 ATM  | 50 METERS<br>165 FEET   | ○                 | ○                 | ×                   | ×            |
| 10 ATM   | 100 METERS<br>330 FEET  | ○                 | ○                 | ○                   | ×            |
| 20 ATM   | 200 METERS<br>660 FEET  | ○                 | ○                 | ○                   | ○            |
| 30ATM  | 300 METERS<br>990 FEET  | ○                 | ○                 | ○                   | ○            |
| 50 ATM   | 500 METERS<br>1650 FEET | ○                 | ○                 | ○                   | ○            |
| Always set the crown in closed position (the normal position). Tighten screw-down crowns completely. |                         |                   |                   |                     |              |